




## FEATURES

- Allows standard triplex pump to generate flow pulsations on demand to improve nozzle movement and cleaning power in sewer cleaning applications.
- Simple operation allows both full-flow and pulsation modes.
- Large easy-to-grasp handle allows gloved operation.
- Designed and made in the USA.
- Easy installation - simply replace middle valve cap and valve on any TT, TC, EZ, 47, TX63, ET, EP or ES/N Series pump.

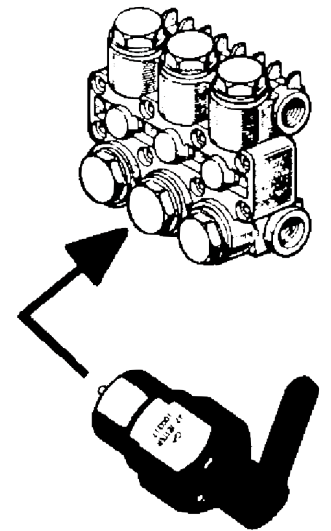

## SPECIFICATIONS

PART NUMBER	PUMPS	MAXIMUM PRESSURE	DIMENSIONS	WEIGHT	MATERIALS
100315	TT & TC Series	3,500 PSI	1.25" Hex;	.5 lb.	Brass, Buna-N, Teflon, Stainless Steel
100316	EZ, TX63, EP ES, ES/N Series		1.5" from center to handle edge;		
100317	47 Series (Coarse Thread)		2.5" from manifold to valve top		
100072	47 Series (Fine Thread)				
101065	ET Series				

*Note: this valve reduces pump flow by 1/3 when engaged; prolonged use can result in a run-dry condition that will decrease plunger seal life.*



General Pump  
is a member of  
the Interpump Group

