

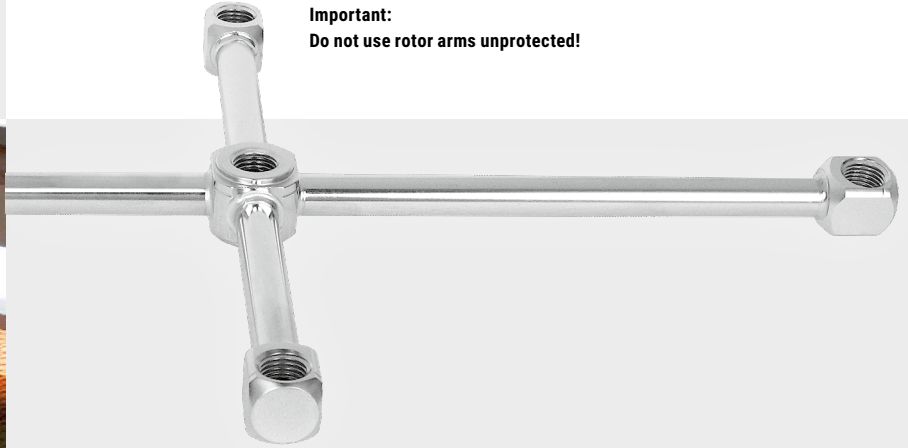


- ✓ Polished stainless steel
- ✓ Solid yet light construction
- ✓ Precision welded and balanced

High pressure rotor arms are constructed of stainless steel and come in a variety of configurations. Welded and balanced to eliminate dangerous vibrations and ensure smooth performance.

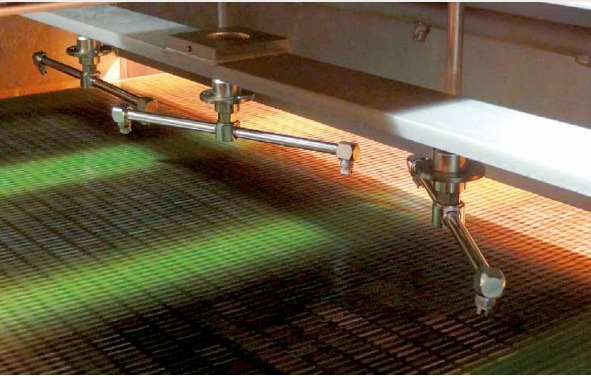

Important:
Do not use rotor arms unprotected!

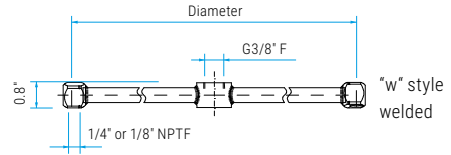

TKA-2w2 (for two nozzles)

Part No. 1/4" Nozzles	Part No. 1/8" Nozzles	Diameter
82.705	82.805	4"
82.706	82.806	6"
82.707	82.807	8"
82.708	82.808	10"
82.709	82.809	12"
82.710	82.810	14"
82.711	82.811	16"
82.712	82.812	18"
82.713	82.813	20"
82.714	82.814	22"
82.715	82.815	24"

TKA-3w3 (for three nozzles)

Part No. 1/4" Nozzles	Part No. 1/8" Nozzles	Diameter
82.765	82.865	4"
82.766	82.866	6"
82.767	82.867	8"
82.768	82.868	10"
82.769	82.869	12"
82.770	82.870	14"
82.771	82.871	16"
82.772	82.872	18"
82.773	82.873	20"
82.774	82.874	22"
82.775	82.875	24"

TKA-2w3 (for three nozzles)

Part No. 1/4" Nozzles	Part No. 1/8" Nozzles	Diameter
82.720	82.820	4"
82.721	82.821	6"
82.722	82.822	8"
82.723	82.823	10"
82.724	82.824	12"
82.725	82.825	14"
82.726	82.826	16"
82.727	82.827	18"
82.792	82.892	18.5"
82.728	82.828	20"
82.729	82.829	22"
82.730	82.830	24"






TKA-4w4 (for four nozzles)

Part No. 1/4" Nozzles	Part No. 1/8" Nozzles	Diameter
82.731	82.831	8"/8"
82.733	82.833	14"/8"
82.735	82.835	16"/6"
82.737	82.837	16"/10"
82.742	82.842	18.5"/14"
82.743	82.843	20"/14"

TKA-4w5 (for five nozzles)

Part No. 1/4" Nozzles	Part No. 1/8" Nozzles	Diameter
82.746	82.846	8"/8"
82.748	82.848	14"/8"
82.750	82.850	16"/6"
82.752	82.852	16"/10"
82.757	82.857	18.5"/14"
82.758	82.858	20"/14"

Other styles



Matching swivel are models: DYT, DYCI, DYF, DYG, DYL

Mosmatic offers a variety of hardened stainless steel high pressure nozzles. All wash jet nozzles (Meg) are available in various sizes and spray angles. Standard nozzles are 1/8" & 1/4" NPTM, spray angles 0°, 5°, 15° & 25° and sizes 2 through 10.

Nozzles not included.

TECHNICAL DATA

Pressure	4000 psi (27.5 MPa) also available as 7300 psi (50 MPa)
Temperature	250°F
Body & pipe	stainless steel
IN	G3/8" F
OUT (for nozzles)	1/4" NPTF / 1/8" NPTF
Throughput medium	pH 3-12

Legend

M.. = metric thrust, ..M = male, F = female, G = gas pipe thrust, R = gas pipe thrust conical, QV = quick connects, SV = profile ring fitting
D = diameter, L = length, NW = nominal width, SW = wrench size, IN = media input, OUT = media output, RS = basic position