

- ✓ **Integrated Recovery**
- ✓ **Temperatures up to 250°F**
- ✓ **Integrate high quality toggle swivel**
- ✓ **Ready to use**

New Mosmatic Surface Cleaner Aqua with Integrated Recovery. The dirty water is recovered and expelled with the Venturi principle eliminating the need for a vacuum system. Simply place your export hose to a desired drain point. Areas both large and small are cleaned effectively and efficiently without requiring bulky vacuum systems and long runs of hosing.



TECHNICAL DATA

Pressure 4000 psi
Temperature 250°F
Inlet 3/8" NPTF




FL-SAR

FEATURES

Integrated self recovery/export

The black anodized aluminum suction device collects the dirty water via the Venturi and double housing principal. Mount your export hose on the suction device and place it into the desired port to drain the water. The use of a vacuum system is no longer needed.

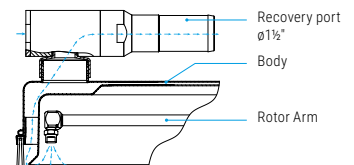

Rotor Arms

Can withstand up to 4000 psi, are precision welded and balanced.

2w2 (2 Arms / 2 Nozzles)
 Part No. 82.623 (ø10")



Swiss Engineering

High rpm stainless steel swivel features reinforced self lubricated stainless steel ball bearings for improved performance. The dual spring based carbide seal system, guarantees long lasting operation under tough conditions.



KDYF Toggle Swivel

Part No. 58.912

Stainless Steel Caster

Heavy duty ø2¼" casters with custom mounting brackets ensure easy manoeuvring even in confined spaces.



Stainless Steel Caster

Part No. 80.943

| Name | Part No. | ø | Weight | Swivel | Rotor Arm | Nozzles | HP-Gun | Casters |
|---------------|---------------|-----|--------|---------|--------------|------------------|--------|---------|
| FL-SAR | 78.293 | 12" | 13 lbs | 1x KDYF | 2x 1/8" NPTF | 2x 1503 / 1x #3* | 1x | 3x ø2¼" |

Accessories

| Name | Part No. | Nozzles |
|------------------------|---------------|------------------|
| Nozzles package | 78.983 | 2x 1502 / 1x #2* |

* #2 and #3 internal nozzles self recovery