

HYBRID™ 200-15



3000
PSI

15
L/PM

ELECTRIC MOTOR
5.5KW 3 PHASE
MOTOR TYPE

DIRECT SOFT
COUPLING
1450RPM
DRIVE

HOT
WATER
OUTPUT



HERO INNOVATIONS



PEXO™
Galvanised Frame



JWPP™
Jetwave Italian Premium Pump



DTS™
Delayed Timer Stop



CLASS A AS/NZS 4233.1
PRESSURE CLEANER
NO RTO CERTIFICATION REQUIRED FOR OPERATORS

APPLICATIONS

Food & Beverage Cleaning

Transportation & Logistics

Agriculturist

Factory Cleaning



STANDOUT FEATURES



JW® Enhanced Italian triplex plunger pump running at 1450RPM delivers more performance and longer life.



Maintenance free low speed, electric motor, air cooled and protected with thermal cut-out.



Jetwave Safety System™ (JSS) thermal and safety valve to prevent overheating in excessive bypass and over pressurisation.



Zero line pressure brass adjustable unloader valve.



Quality assured voltage electrical control box for increased protection against dust and water ingress.



DTS™ Delayed Timer Stop electronic control for overall unit protection.


STANDARD EQUIPMENT



J5000™ High Pressure Gun + Twin Lance with Nozzles.



10m Double Wire Braid Hose with M22 Couplings.

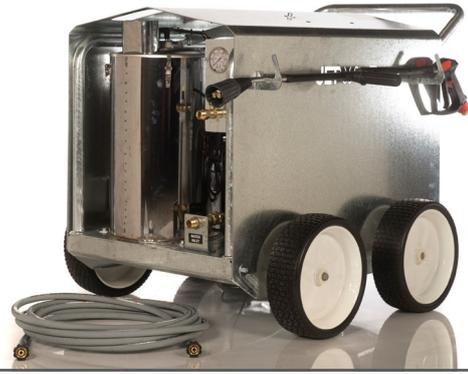

TECHNICAL DATA

HYBRID™

200-15

| | |
|-------------------------------|--|
| Product Code | HW200-15ELCP24TS |
| Pressure / Flow Rate | 3000 PSI (200 BAR) / 15 L/PM |
| Max Water Inlet / Outlet Temp | 60°C / 90°C |
| Class (ASNZS: 4223) | A (3,000 Bar/Litres) |
| Usage Frequency | Industrial: 6 - 8 Hours Daily |
| Nozzle Size | O45 |
| Frame Structure | Hot dipped galvanised with 4 wheel trolley kit |

MOTOR FEATURES

| | |
|------------------------|---|
| Motor / Power | Induction / 5.5kW / 3 Phase / 415v / 50Hz |
| Cable Length / Control | 8M / Delayed Timer Stop DTS™ |

HYDRAULIC FEATURES

| | |
|--------------------------------|---|
| Pump / Head / Pistons | JW® Italian Triplex Plunger / Brass (Nickle Plated) / Ceramic |
| Motor Pump Coupling / Pump RPM | Soft Coupling Drive / 1450RPM |
| Unloader Valve | Independent (Zero) - Adjustable |
| Safety Valve | Yes |
| Detergent Injector | Yes - Downstream low pressure (power boost) |

THERMAL FEATURES

| | |
|--------------------------------------|---|
| Burner Model | Vertical 12v |
| Fuel Supply / Capacity / Consumption | Diesel / 20L / 5.74 L/PH |
| Coil / Housing Material | Mild steel 3mm wall seamless (400BAR rated) / Stainless Steel |

DIMENSIONS & WEIGHT

| | |
|-----------------------------|--|
| Machine Dimensions / Weight | Skid: 920mm(L) x 600mm(W) x 730mm(H) / 195KG |
|-----------------------------|--|

WARRANTY(S)

| | |
|-----------------------|---|
| Unit / Pump Warranty* |  2 Years |
| Motor Warranty* |  2 Years |

OPTIONAL ACCESSORIES

| | |
|--|-------------|
| 30m Hose Reel <small>(REQUIRES MOUNTING BRACKET)</small> | 1060CMPL |
| 60m Hose Reel <small>(REQUIRES MOUNTING BRACKET)</small> | 1067CMPL |
| Hose Reel Mounting Bracket | 9003OHRP |
| Additional High Pressure Hose | 52001 |
| JW12 Foaming Lance w/1L Tank | JWA221-LS12 |
| JW Bypass Pro Foam | PROFOAM |
| Turbo Head w/Lance (300BAR) | JWA160 |
| 21" Hammerhead - Plastic | JWA-FSC21 |
| 21" Hammerhead - Stainless Steel | JWA-FSC21-5 |

OPTIONAL UPGRADES

| | |
|-------------------------|------------------|
| Hour Meter | RQ48024VAC |
| Emergency Stop | JWA218 |
| On-Board Bypass Tank | 90008-12ROTOCMPL |
| Low Level Water Cut Out | JWA217 |
| Forklift Pockets | 90051FP |

The manufacturer reserves the right to modify design features and technical facts without notice, due to our principals of continuous improvement.

*Coverage against defects in material and workmanship (refer to Jetwave's and component partners T&Cs).

V2.2 08/21